


UNIVERSAL LINE



SPECIFICATION:	Indoor LED Screen		Outdoor LED Screen	
	2.976 mm	3.9 mm	3.9 mm	4.81 mm
Pixel Pitch (mm):	2.976	3.9	3.9	4.81
LED Source:	SMD1515	SMD2121	SMD2121	SMD2121/SMD2525
Module type:	SCL layer/regular protective mask			
Module Size (mm):	250 x 250	250 x 250	250 x 250	250 x 250
Resolution:	168x168 pixels	128x128 pixels	128x128 pixels	104x104 pixels
Refresh Rate:	≥3840 Hz	≥3840 Hz	≥3840 Hz	≥3840 Hz
Brightness (nits):	≥1300	≥1300	≥4500	≥4500/5500
Color Depth:	16 bit	16 bit	16 bit	16 bit
Receiving Card:	NovaStar A5	NovaStar A5	NovaStar A5	NovaStar A5
Dimension (mm):	500 x 500 x 74	500 x 500 x 74	500 x 500 x 74	500 x 500 x 74
Scanning Method:	1\21	1\16	1\13	1\13
Input Voltage:	AC110240 V-50/60 Hz			
Max Power Consumption:	120 W	≤120 W	≤300 W	≤300 W
Average Power Consumption:	≤60 W	≤60 W	≤100 W	≤100 W
Cabinet Weight (kg):	8.5	8.5	8.5	8.5
Protection Rate:	IP31	IP31	IP56/ IP56	IP56/ IP56
Maintenance Mode:	Front / Back	Front / Back	Front / Back	Front / Back

UNIVERSAL LINE

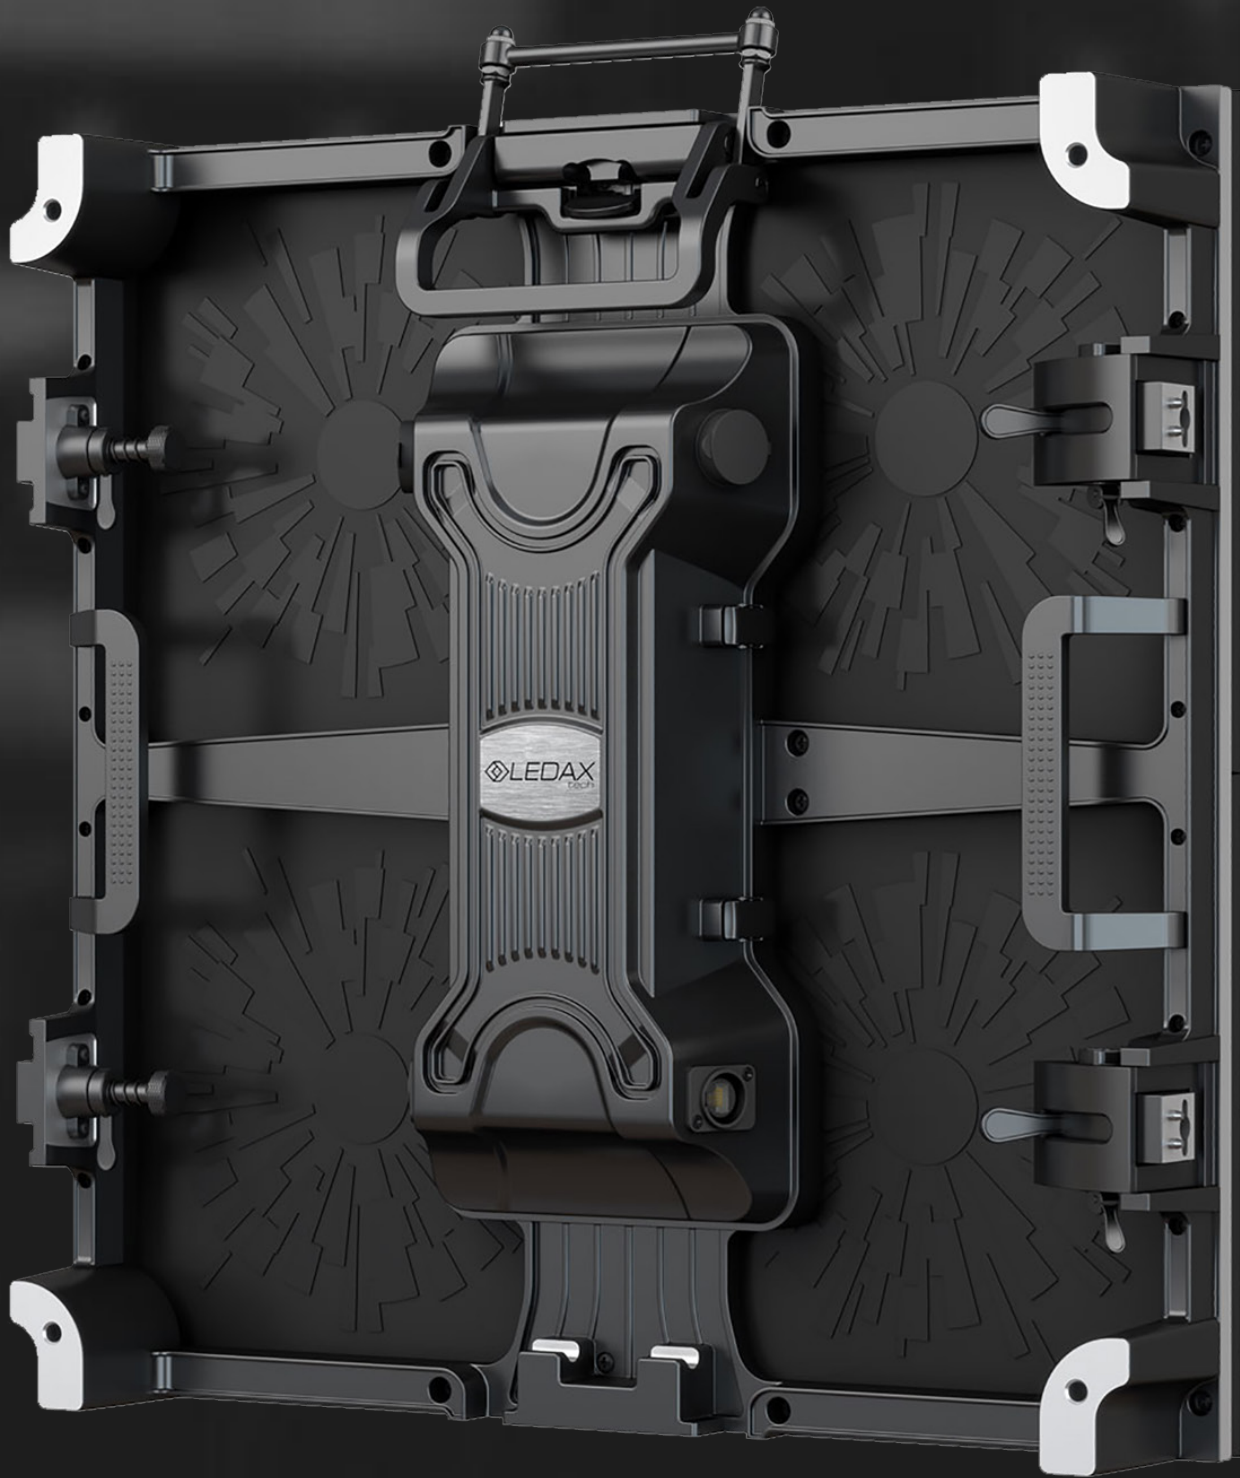


SPECIFICATION:	3.0 mm	4.0 mm
Pixel Pitch (mm):	3.0	4.0
Resolution:	128x192 pixels	128x128 pixels
Refresh Rate:	≥3840 Hz	≥3840 Hz
LED Source:	SMD2121	SMD2121
Brightness (nits):	≥1300	≥1300
Color Depth:	16 bit	16 bit
Receiving Card:	NovaStar MRV328	
Input Voltage:	AC110-240 V-50/60 Hz	
Max Power Consumption:	≤120 W	≤120 W
Average Power Consumption:	≤60 W	≤60 W
Dimension(mm):	384 x 576	512 x 512
Module Quantity:	2x3 pcs	2x4 pcs
Cabinet Weight:	10 lb	10 lb
Scanning Method:	1\32	1\16
Protection Rate:	IP31	IP31
Maintenance Mode:	Front / Back	Front / Back

COBALT LINE



SPECIFICATION:	Indoor LED Screen		
	2.6 mm	2.9 mm	3.9 mm
Pixel Pitch (mm):	2.6	2.9	3.9
SMD type:	SMD1515	1515/1921/2020	1921/2020
Module type:	SCL layer/regular protective mask		
Cabinet size (mm):	500 x 500	500 x 500	500x500 / 500x1000
Cabinet Resolution:	192x192 pxs	168x168 pxs	128x128 pxs
Brightness:	1000 Nits	1000-1300 Nits	1300 Nits
Refresh Rate:	3840 HZ	3840 HZ	3840 HZ
Color Depth:	16 bit	16 bit	16 bit
Receiving Card:	NovaStar A5	NovaStar A5	NovaStar A5
Max Power Consumption:	100 W	100 W	100 W
Average Power Consumption:	50 W	50-60 W	60 W
Input Voltage:	AC100-240 V 50/60 Hz		
Working Temperature:	-40~140 F	-40~140 F	-40~140 F
Working Humidity:	10-95 %	10-95 %	10-95 %
Weight:	16 lb	16 lb	16 lb
IP protection:	IP65	IP65	IP65

TRANSPARENT SCREEN WATERPROOF / RUSTPROOF

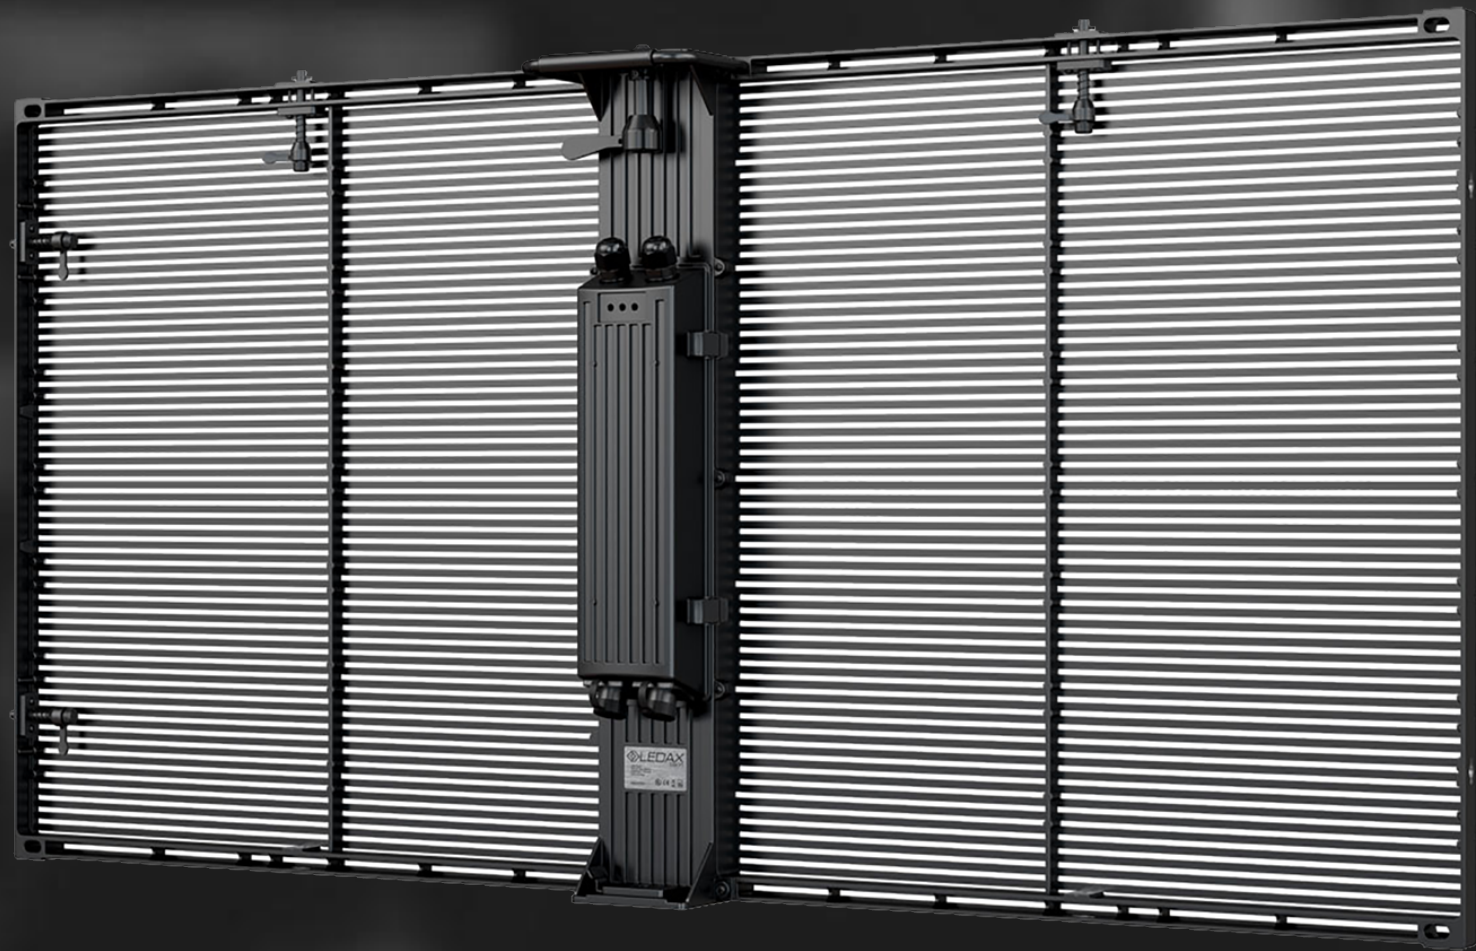

SPECIFICATION:

Pitch:	Horizontal 3.9 mm / Vertical 7.8 mm
Resolution:	256x64 pxs
Transparency:	75 %
Refresh Rate:	3840 Hz
LED source:	indoor SMD2020, SMD1921
Brightness:	1300 / 2600 / 4500 nits
Color Depth:	16 bit
Receiving Card:	NovaStar A4
Input Voltage:	110-220 V
Max Power Consumption:	250 W
Average Power Consumption:	150 W
Dimension (mm):	1000 x 500 x 65
Weight:	12 lb
Protection Rate:	IP65